



# GENIE 1

## ARCHITECTS & ENGINEERING SPECIFICATIONS

- The Genie1 is a two way design utilizing high grade transducer complements
- Aluminium die-cast micro monitor
- The LS301(i) provides high quality sound, extended coverage over a wide bandwidth
- Top performance in terms of audio quality coupled with minimal visual impact
- Applications such as background music, boardrooms, reception areas, retail outlets, restaurants etc.
- Inputs are connected to gold plated binding posts
- Easy to install, unobtrusive wall mount available

### SPECIFICATIONS

Frequency Response, swept gated sine wave, 1W at 1M ( $\pm 3$ dB)	120 ~ 20,000 Hz
Frequency Range (-10dB)	90 ~ 22,000 Hz
Long Term Average Power Handling Capacity (Low cut @80 Hz)	60 watt
Full range power handling capacity	40 watt
Sensitivity (SPL at 1Watt 1meter)	87 dB
Transducer Complements	1 x 3" coated cone woofer 1 x 1/2" polycarbonate dome tweeter
Crossover Frequency	5.5 kHz
Nominal Impedance	8 ohm
Minimum Impedance	6.8 ohm
Input connectors	Gold plated binding posts
Enclosure type	Sealed Aluminium die- cast cabinet
Finish	White painted
Grille	White painted, metal perforated
Dimensions (including terminals) HxWxD	148 x 88 x 110 (mm)
Mounting Accessories	Wall / Floor brackets available
Weight	1.4 Kg

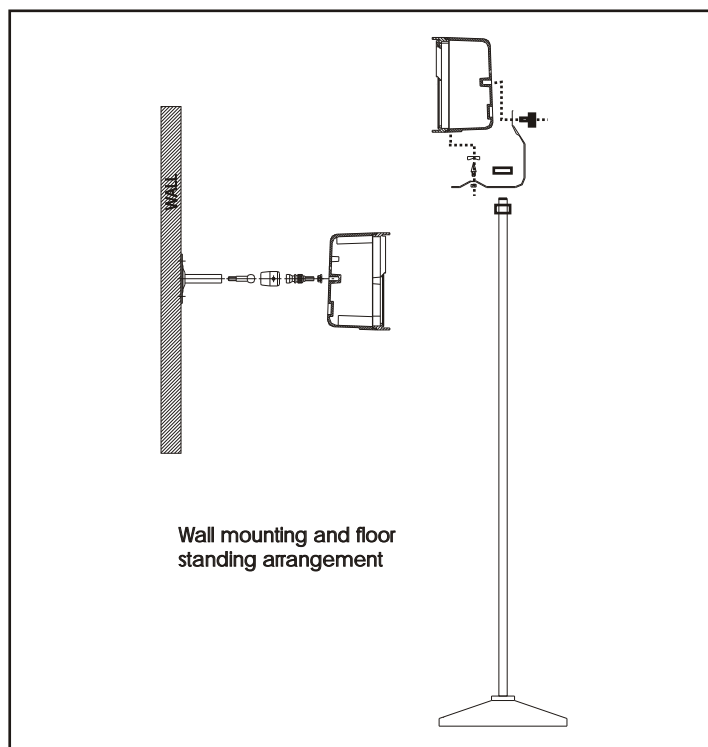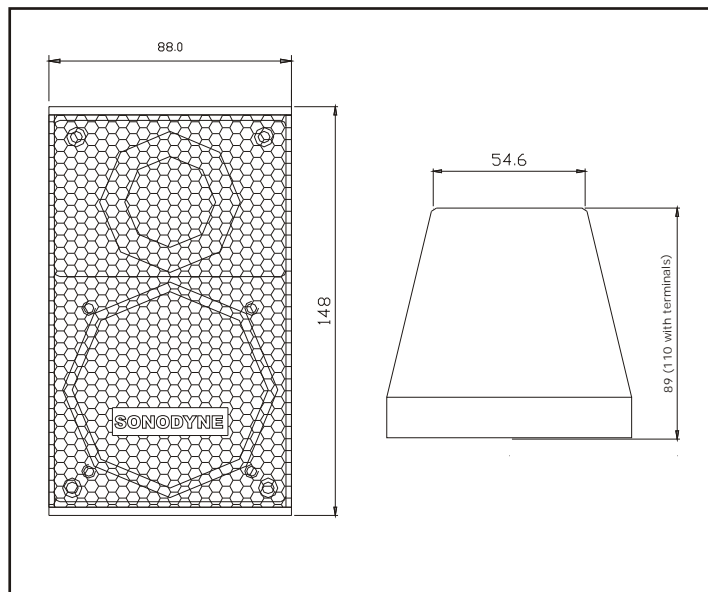

**SONODYNE**

www.sonodyne.com