



ESMIX RACK MOUNT MIXER

ESMIX



Front Panel



4 inputs



Inputs



Tone Generator



Priority Muting

The Australian Monitor ESMIX is the latest evolution of our Essentials Series of Mixers, now featuring 2 channels of priority VOX muting, integrated tone generator and a modern look and finish.

The ES mixer amplifiers maintain the core features you expect including 4 XLR mic/dual RCA line inputs, record output, line output and 12V phantom power.


The ESMIX offers the latest features to meet projects requiring the most cost-effective solutions.

FEATURES


- 4 Channel Mixer
- 4 XLR Microphone/Dual RCA Line Inputs
- 2 channel priority muting (VOX) (externally defeatable)
- 12VDC Phantom Power
- Bass and Treble Tone Controls
- Record Output
- Line Output
- Integrated 5 Tone Generator with volume control
- Rack mount size
- 1 RU



Priority and Phantom Power

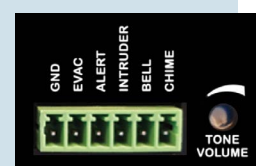

5 Tone Generator

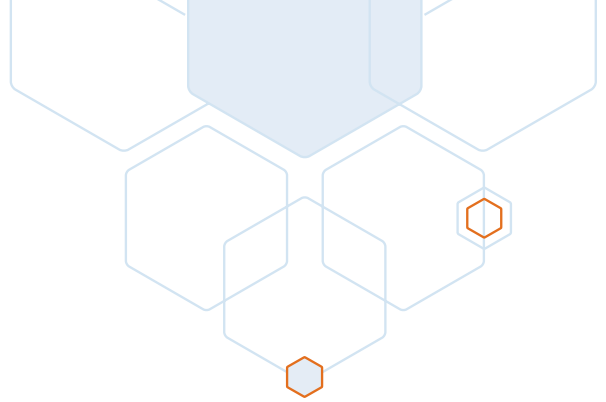

Rear Panel

MODEL	ESMIX
CHANNELS	1
PRE-AMPLIFIER	
INPUT/OUTPUT CONNECTORS	Balanced XLR - MIC Input and Line Output Unbalanced stereo RCA - LINE input and Record Output
FREQUENCY RESPONSE	10Hz ~ 35kHz
SIGNAL TO NOISE RATIO	>80dB
THD+N. 1kHz	<0.1%
INPUT SENSITIVITY	MIC: 1.2mVrms RCA: 160mVrms
LINE OUTPUT	770mV
RECORD OUTPUT	210mV
TONE CONTROLS	Bass @ 100Hz $\pm$ 12dB Treble @ 10kHz $\pm$ 9dB
ADDITIONAL FEATURES	12V Phantom Power 2 Channel Priority VOX muting 5 Tone Generator with volume control Evac, Alert, Intruder, Bell, Chime
MISCELLANEOUS	
DC INPUT	24DC @ 0.05A
MOUNTING	1RU
DIMENSIONS (W x D x H)	484mm x 188mm x 44.5mm (19.0"W x 7.4"D x 1.75"H)
OPERATING TEMPERATURE	0°C to 40°C (95% RH)
COLOUR	Black

Due to continuous improvements, all specifications are subject to change



ENGINEERED BY AUSTRALIAN MONITOR

Address: 1 Clyde St, Silverwater NSW 2128 Australia.

Website: www.australianmonitor.com.au

International enquiries email: international@australianmonitor.com.au

ABN 35 007 573 417